




LED Office Linear Light-Juno Series

120V/220V

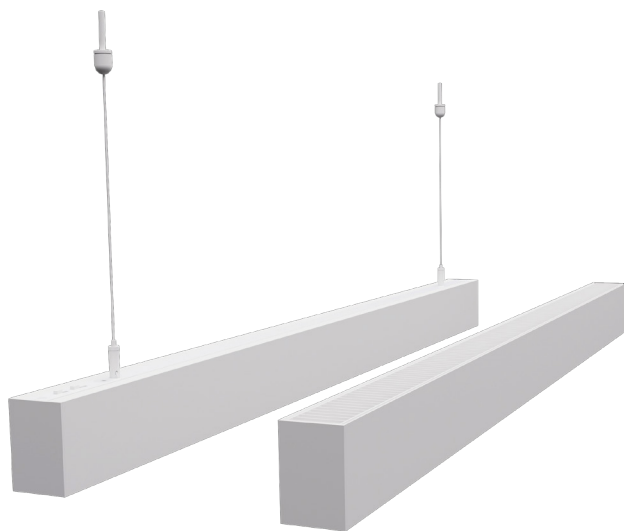

Features



Slider Switch
Two Slide switches to adjust the Up & Down color temperature separately



Various Optics
PC/PMMA diffuser, Grille & Reflector, meet different light requirement



3CCT
3CCT changeable to create different ambiance



Aluminum Housing
Good heat dissipation, Long life-span for fixture



High CRI
Human-centric, CRI>Ra90, good for eye protection



Various Power Supply
On/Off, 0~10V Dimming, DALI Dimming, compatible to different system



Multi Installation Way
Surface-mounted, recessed & suspension, meet different scenarios



High Efficacy
High efficacy over 110lm/W, energy saving





Up & Down Light
Up & Down light to create comfortable environment



Linkable
Linkable up to 400W with multi-connectors

Applications



Certificates




LED Office Linear Light-Juno Series

120V/220V, Single Unit

Product Features:

LEDIA Juno Series office linear light with innovative design and superior performance, aims to provide a professional lighting solution for offices and relevant public scenarios. Various sizes (4 sizes) and wattages (from 30W to 60W) with diverse optics (PC diffuser, PMMA-Microprism, Grille, Honeycomb, etc.), multi installation way (Surface-mounted & suspension) can meet different project demands. Up & Down light to create comfortable light environment, CCT changeable to meet different light request, slider switch to change the CCT and separately change for Up or Down light. With different connectors, this linear light can be linkable freely. Various power supply (On/Off, 0~10V Dimming, DALI Dimming) can be compatible with different systems. This linear light is perfect and widely applied for office, gallery, library, classroom etc.

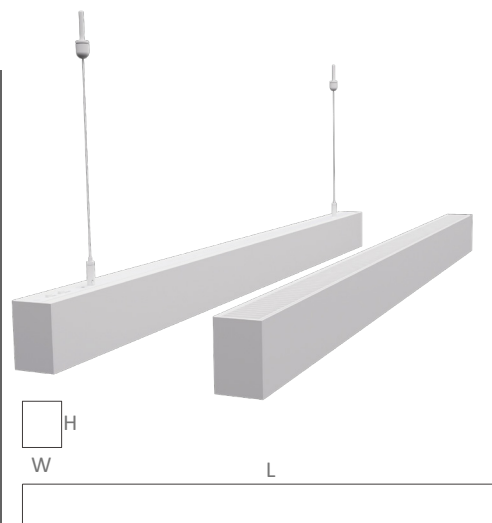

ORDERING INFORMATION:

Family	Category	Size	Color	CRI+CCT	Linkable&Light	Power Supply	Optics
LDOL	Jxx	xx	y	xxx	xx	z	xx
LD: LEDIA	J01: Juno 01 Series	12: 1126mm	W: White	930: CRI>90, 3000K	SD: Single and Downward light	I: On/Off;	HC: Honeycomb
OL: Office Linear Light	J02: Juno 02 Series	15: 1406mm 18: 1706mm 24: 2248mm	B: Black	940: CRI>90, 4000K 950: CRI>90, 5000K CCT: 3CCT, 3000K-5000K	SU: Single and Upward & Downward light	V: 0~10V Dimming T: Triac Dimming D: DALI	GR: Grille

BASIC INFORMATION:


Model No.	Dimensions (L*W*H)	Wattage	CCT	CRI	Luminous Flux	Color
LDOL-Jxx-12-y-9n0-SD-z-xx	1126*52*76mm	30W	3000K/4000K/5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-9n0-SD-z-xx	1406*52*76mm	37.5W	3000K/4000K/5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-9n0-SD-z-xx	1706*52*76mm	45W	3000K/4000K/5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-9n0-SD-z-xx	2248*52*76mm	60W	3000K/4000K/5000K	>Ra90	6000lm	White/Black
LDOL-Jxx-12-y-9n0-SU-z-xx	1126*52*76mm	30W	3000K/4000K/5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-9n0-SU-z-xx	1406*52*76mm	40W	3000K/4000K/5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-9n0-SU-z-xx	1706*52*76mm	50W	3000K/4000K/5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-9n0-SU-z-xx	2248*52*76mm	60W	3000K/4000K/5000K	>Ra90	6000lm	White/Black
LDOL-Jxx-12-y-CCT-SD-z-xx	1126*52*76mm	30W	3CCT, 3000K-5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-CCT-SD-z-xx	1406*52*76mm	37.5W	3CCT, 3000K-5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-CCT-SD-z-xx	1706*52*76mm	45W	3CCT, 3000K-5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-CCT-SD-z-xx	2248*52*70mm	60W	3CCT, 3000K-5000K	>Ra90	6000lm	White/Black
LDOL-Jxx-12-y-CCT-SU-z-xx	1126*52*76mm	30W	3CCT, 3000K-5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-CCT-SU-z-xx	1406*52*76mm	37.5W	3CCT, 3000K-5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-CCT-SU-z-xx	1706*52*76mm	45W	3CCT, 3000K-5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-CCT-SU-z-xx	2248*52*76mm	60W	3CCT, 3000K-5000K	>Ra90	6000lm	White/Black

LED Office Linear Light-Juno Series

120V/220V, Linkable Unit

Product Features:

LEDIA Juno Series office linear light with innovative design and superior performance, aims to provide a professional lighting solution for offices and relevant public scenarios. Various sizes (4 sizes) and wattages (from 30W to 60W) with diverse optics (PC diffuser, PMMA-Microprism, Grille, Honeycomb, etc.), multi installation way (Surface-mounted & suspension) can meet different project demands. Up & Down light to create comfortable light environment, CCT changeable to meet different light request, slider switch to change the CCT and separately change for Up or Down light. With different connectors, this linear light can be linkable freely. Various power supply (On/Off, 0~10V Dimming, DALI Dimming) can be compatible with different systems. This linear light is perfect and widely applied for office, gallery, library, classroom etc.

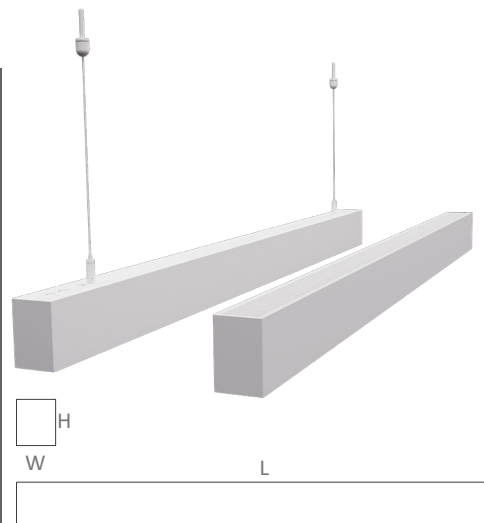

ORDERING INFORMATION:

Family	Category	Size	Color	CRI+CCT	Linkable&Light	Power Supply	Optics
LDOL	Jxx	xx	y	xxx	xx	z	xx
LD: LEDIA	J01: Juno 01 Series	12: 1126mm	W: White	930: CRI>90, 3000K	LD: Linkable and Downward light	I: On/Off;	HC: Honeycomb
OL: Office Linear Light	J02: Juno 02 Series	15: 1406mm 18: 1706mm 24: 2248mm	B: Black	940: CRI>90, 4000K 950: CRI>90, 5000K CCT: 3CCT, 3000K-5000K	LU: Linkable and Upward & Downward light	V: 0~10V Dimming T: Triac Dimming D: DALI	GR: Grille

BASIC INFORMATION:


Model No.	Dimensions (L*W*H)	Wattage	CCT	CRI	Luminous Flux	Color
LDOL-Jxx-12-y-9n0-LD-z-xx	1126*52*76mm	30W	3000K/4000K/5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-9n0-LD-z-xx	1406*52*76mm	37.5W	3000K/4000K/5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-9n0-LD-z-xx	1706*52*76mm	45W	3000K/4000K/5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-9n0-LD-z-xx	2248*52*76mm	60W	3000K/4000K/5000K	>Ra90	6000lm	White/Black
LDOL-Jxx-12-y-9n0-LU-z-xx	1126*52*76mm	30W	3000K/4000K/5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-9n0-LU-z-xx	1406*52*76mm	40W	3000K/4000K/5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-9n0-LU-z-xx	1706*52*76mm	50W	3000K/4000K/5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-9n0-LU-z-xx	2248*52*76mm	60W	3000K/4000K/5000K	>Ra90	6000lm	White/Black
LDOL-Jxx-12-y-CCT-LD-z-xx	1126*52*76mm	30W	3CCT, 3000K-5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-CCT-LD-z-xx	1406*52*76mm	37.5W	3CCT, 3000K-5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-CCT-LD-z-xx	1706*52*76mm	45W	3CCT, 3000K-5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-CCT-LD-z-xx	2248*52*76mm	60W	3CCT, 3000K-5000K	>Ra90	6000lm	White/Black
LDOL-Jxx-12-y-CCT-LU-z-xx	1126*52*76mm	30W	3CCT, 3000K-5000K	>Ra90	3000lm	White/Black
LDOL-Jxx-15-y-CCT-LU-z-xx	1406*52*76mm	37.5W	3CCT, 3000K-5000K	>Ra90	3750lm	White/Black
LDOL-Jxx-18-y-CCT-LU-z-xx	1706*52*76mm	45W	3CCT, 3000K-5000K	>Ra90	4500lm	White/Black
LDOL-Jxx-24-y-CCT-LU-z-xx	2248*52*76mm	60W	3CCT, 3000K-5000K	>Ra90	6000lm	White/Black

LED Office Linear Light-Juno Series

120V/220V, Single Unit

Product Features:

LEDIA Juno Series office linear light with innovative design and superior performance, aims to provide a professional lighting solution for offices and relevant public scenarios. Various sizes (4 sizes) and wattages (from 30W to 60W) with diverse optics (PC diffuser, PMMA-Microprism, Grille, Honeycomb, etc.), multi installation way (Surface-mounted & suspension) can meet different project demands. Up & Down light to create comfortable light environment, CCT changeable to meet different light request, slider switch to change the CCT and separately change for Up or Down light. With different connectors, this linear light can be linkable freely. Various power supply (On/Off, 0~10V Dimming, DALI Dimming) can be compatible with different systems. This linear light is perfect and widely applied for office, gallery, library, classroom etc.

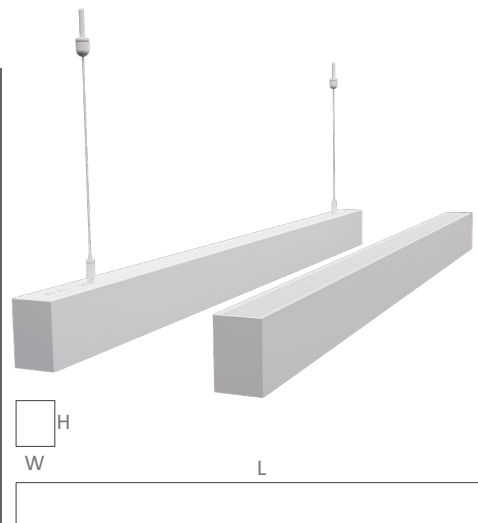

ORDERING INFORMATION:

Family	Category	Size	Color	CRI+CCT	Linkable&Light	Power Supply	Optics
LDOL	Jxx	xx	y	xxx	xx	z	xx
LD: LEDIA	J01: Juno 01 Series	12: 1126mm	W: White	930: CRI>90, 3000K	SD: Single and Downward light	I: On/Off;	HC: Honeycomb
OL: Office Linear Light	J02: Juno 02 Series	15: 1406mm 18: 1706mm 24: 2248mm	B: Black	940: CRI>90, 4000K 950: CRI>90, 5000K CCT: 3CCT, 3000K-5000K	SU: Single and Upward & Downward light	V: 0~10V Dimming T: Triac Dimming D: DALI	GR: Grille

PACKING INFORMATION:


Model No.	Inner Box Size	Pcs in Middle box	Pcs in Master Carton	Gross Weight	Carton Size(L*W*H)
LDOL-Jxx-12-y-9n0-SD-z-xx	1165*78*117mm	/	4	8.4kgs	1185*327*136mm
LDOL-Jxx-15-y-9n0-SD-z-xx	1445*78*117mm	/	4	10.9kgs	1465*327*136mm
LDOL-Jxx-18-y-9n0-SD-z-xx	1725*78*117mm	/	4	13.0kgs	1745*327*136mm
LDOL-Jxx-24-y-9n0-SD-z-xx	2285*78*117mm	/	4	17.6kgs	2305*327*136mm
LDOL-Jxx-12-y-9n0-SU-z-xx	1165*78*117mm	/	4	8.4kgs	1185*327*136mm
LDOL-Jxx-15-y-9n0-SU-z-xx	1445*78*117mm	/	4	10.9kgs	1465*327*136mm
LDOL-Jxx-18-y-9n0-SU-z-xx	1725*78*117mm	/	4	13.0kgs	1745*327*136mm
LDOL-Jxx-24-y-9n0-SU-z-xx	2285*78*117mm	/	4	17.6kgs	2305*327*136mm
LDOL-Jxx-12-y-CCT-SD-z-xx	1165*78*117mm	/	4	8.4kgs	1185*327*136mm
LDOL-Jxx-15-y-CCT-SD-z-xx	1445*78*117mm	/	4	10.9kgs	1465*327*136mm
LDOL-Jxx-18-y-CCT-SD-z-xx	1725*78*117mm	/	4	13.0kgs	1745*327*136mm
LDOL-Jxx-24-y-CCT-SD-z-xx	2285*78*117mm	/	4	17.6kgs	2305*327*136mm
LDOL-Jxx-12-y-CCT-SU-z-xx	1165*78*117mm	/	4	8.4kgs	1185*327*136mm
LDOL-Jxx-15-y-CCT-SU-z-xx	1445*78*117mm	/	4	10.9kgs	1465*327*136mm
LDOL-Jxx-18-y-CCT-SU-z-xx	1725*78*117mm	/	4	13.0kgs	1745*327*136mm
LDOL-Jxx-24-y-CCT-SU-z-xx	2285*78*117mm	/	4	17.6kgs	2305*327*136mm

LED Office Linear Light-Juno Series

120V/220V, Linkable Unit

Product Features:

LEDIA Juno Series office linear light with innovative design and superior performance, aims to provide a professional lighting solution for offices and relevant public scenarios. Various sizes (4 sizes) and wattages (from 30W to 60W) with diverse optics (PC diffuser, PMMA-Microprism, Grille, Honeycomb, etc.), multi installation way (Surface-mounted & suspension) can meet different project demands. Up & Down light to create comfortable light environment, CCT changeable to meet different light request, slider switch to change the CCT and separately change for Up or Down light. With different connectors, this linear light can be linkable freely. Various power supply (On/Off, 0~10V Dimming, DALI Dimming) can be compatible with different systems. This linear light is perfect and widely applied for office, gallery, library, classroom etc.

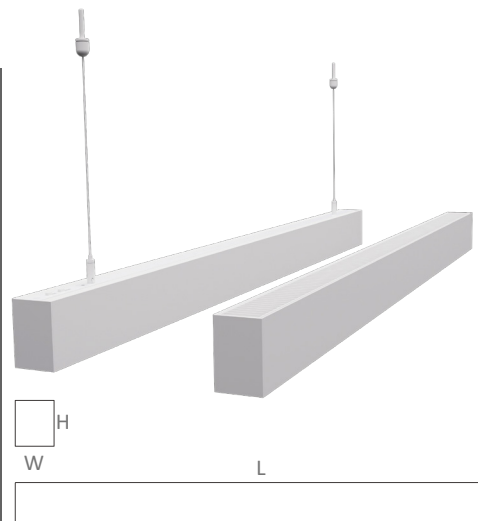

ORDERING INFORMATION:

Family	Category	Size	Color	CRI+CCT	Linkable&Light	Power Supply	Optics
LDOL	Jxx	xx	y	xxx	xx	z	xx
LD: LEDIA	J01: Juno 01 Series	12: 1126mm	W: White	930: CRI>90, 3000K	LD: Linkable and Downward light	I: On/Off;	HC: Honeycomb
OL: Office Linear Light	J02: Juno 02 Series	15: 1406mm 18: 1706mm 24: 2248mm	B: Black	940: CRI>90, 4000K 950: CRI>90, 5000K CCT: 3CCT, 3000K-5000K	LU: Linkable and Upward & Downward light	V: 0~10V Dimming T: Triac Dimming D: DALI	GR: Grille

PACKING INFORMATION:

Model No.	Inner Box Size	Pcs in Middle box	Pcs in Master Carton	Gross Weight	Carton Size(L*W*H)
LDOL-Jxx-12-y-9n0-LD-z-xx	1165*78*117mm	/	4	9.2kgs	1185*327*136mm
LDOL-Jxx-15-y-9n0-LD-z-xx	1445*78*117mm	/	4	12.4kgs	1465*327*136mm
LDOL-Jxx-18-y-9n0-LD-z-xx	1725*78*117mm	/	4	14.8kgs	1745*327*136mm
LDOL-Jxx-24-y-9n0-LD-z-xx	2285*78*117mm	/	4	19.0kgs	2305*327*136mm
LDOL-Jxx-12-y-9n0-LU-z-xx	1165*78*117mm	/	4	9.2kgs	1185*327*136mm
LDOL-Jxx-15-y-9n0-LU-z-xx	1445*78*117mm	/	4	12.4kgs	1465*327*136mm
LDOL-Jxx-18-y-9n0-LU-z-xx	1725*78*117mm	/	4	14.8kgs	1745*327*136mm
LDOL-Jxx-24-y-9n0-LU-z-xx	2285*78*117mm	/	4	19.0kgs	2305*327*136mm
LDOL-Jxx-12-y-CCT-LD-z-xx	1165*78*117mm	/	4	9.2kgs	1185*327*136mm
LDOL-Jxx-15-y-CCT-LD-z-xx	1445*78*117mm	/	4	12.4kgs	1465*327*136mm
LDOL-Jxx-18-y-CCT-LD-z-xx	1725*78*117mm	/	4	14.8kgs	1745*327*136mm
LDOL-Jxx-24-y-CCT-LD-z-xx	2285*78*117mm	/	4	19.0kgs	2305*327*136mm
LDOL-Jxx-12-y-CCT-LU-z-xx	1165*78*117mm	/	4	9.2kgs	1185*327*136mm
LDOL-Jxx-15-y-CCT-LU-z-xx	1445*78*117mm	/	4	12.4kgs	1465*327*136mm
LDOL-Jxx-18-y-CCT-LU-z-xx	1725*78*117mm	/	4	14.8kgs	1745*327*136mm
LDOL-Jxx-24-y-CCT-LU-z-xx	2285*78*117mm	/	4	19.0kgs	2305*327*136mm

PRODUCT SPECIFICATIONS:

Model No.	LDOL-Jxx-12-y-9n0-SD-z-xx	LDOL-Jxx-15-y-9n0-SD-z-xx	LDOL-Jxx-18-y-9n0-SD-z-xx	LDOL-Jxx-24-y-9n0-SD-z-xx
	LDOL-Jxx-12-y-9n0-SU-z-xx	LDOL-Jxx-15-y-9n0-SU-z-xx	LDOL-Jxx-18-y-9n0-SU-z-xx	LDOL-Jxx-24-y-9n0-SU-z-xx
	LDOL-Jxx-12-y-9n0-LD-z-xx	LDOL-Jxx-15-y-9n0-LD-z-xx	LDOL-Jxx-18-y-9n0-LD-z-xx	LDOL-Jxx-24-y-9n0-LD-z-xx
	LDOL-Jxx-12-y-9n0-LU-z-xx	LDOL-Jxx-15-y-9n0-LU-z-xx	LDOL-Jxx-18-y-9n0-LU-z-xx	LDOL-Jxx-24-y-9n0-LU-z-xx

Construction & Materials

Diffuser	GR/HC	GR/HC	GR/HC	GR/HC
Housing	Aluminium	Aluminium	Aluminium	Aluminium
Finishing & Color	White/Black	White/Black	White/Black	White/Black
Weight	2.0kgs	2.3kgs	2.7kgs	3.3kgs

Environmental System

Work Environment & IP	IP20	IP20	IP20	IP20
Operating Temperature	-4°F-104°F(-20°C-40°C)	-4°F-104°F(-20°C-40°C)	-4°F-104°F(-20°C-40°C)	-4°F-104°F(-20°C-40°C)
L-70 Life	> 50,000 hrs	> 50,000 hrs	> 50,000 hrs	> 50,000 hrs

Optical System

Luminous Flux	3000lm	3750lm	4500lm	6000lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
CRI	>90	>90	>90	>90

Electrical System

Input Voltage	AC 220-240V/120-277V	AC 220-240V/120-277V	AC 220-240V/120-277V	AC 220-240V/120-277V
Max input current	0.25A	0.32A	0.38A	0.5A
Off State Power	0W	0W	0W	0W
Power Consumption	30W	37.5W	45W	60W
Max. Linkable Wattage	500W@120V	500W@120V	500W@120V	500W@120V
	1000W@230V	1000W@230V	1000W@230V	1000W@230V
	1200W@277V	1200W@277V	1200W@277V	1200W@277V
Dimming	No/0-10V/Triac/DALI	No/0-10V/Triac/DALI	No/0-10V/Triac/DALI	No/0-10V/Triac/DALI
Power Factor	0.95	0.95	0.95	0.95
Output voltage	DC40V±5%	DC40V±5%	DC40V±5%	DC40V±5%
Max output current	700mA	800mA	1050mA	1300mA

Regular and Voluntary Certifications

	5-year limited warranty	5-year limited warranty	5-year limited warranty	5-year limited warranty
	cETLus Certified	cETLus Certified	cETLus Certified	cETLus Certified
	CE Certified	CE Certified	CE Certified	CE Certified

PRODUCT SPECIFICATIONS:

Model No.	LDOL-Jxx-12-y-CCT-SD-z-xx	LDOL-Jxx-15-y-CCT-SD-z-xx	LDOL-Jxx-18-y-CCT-SD-z-xx	LDOL-Jxx-24-y-CCT-SD-z-xx
	LDOL-Jxx-12-y-CCT-SU-z-xx	LDOL-Jxx-15-y-CCT-SU-z-xx	LDOL-Jxx-18-y-CCT-SU-z-xx	LDOL-Jxx-24-y-CCT-SU-z-xx
	LDOL-Jxx-12-y-CCT-LD-z-xx	LDOL-Jxx-15-y-CCT-LD-z-xx	LDOL-Jxx-18-y-CCT-LD-z-xx	LDOL-Jxx-24-y-CCT-LD-z-xx
	LDOL-Jxx-12-y-CCT-LU-z-xx	LDOL-Jxx-15-y-CCT-LU-z-xx	LDOL-Jxx-18-y-CCT-LU-z-xx	LDOL-Jxx-24-y-CCT-LU-z-xx

Construction & Materials

Diffuser	GR/HC	GR/HC	GR/HC	GR/HC
Housing	Aluminium	Aluminium	Aluminium	Aluminium
Finishing & Color	White/Black	White/Black	White/Black	White/Black
Weight	2.1kgs	2.5kgs	3.0kgs	3.6kgs

Environmental System

Work Environment & IP	IP20	IP20	IP20	IP20
Operating Temperature	-4°F-104°F(-20°C-40°C)	-4°F-104°F(-20°C-40°C)	-4°F-104°F(-20°C-40°C)	-4°F-104°F(-20°C-40°C)
L-70 Life	> 50,000 hrs	> 50,000 hrs	> 50,000 hrs	> 50,000 hrs

Optical System

Luminous Flux	3000lm	3750lm	4500lm	6000lm
Color Temperature	3CCT, 3000K-5000K	3CCT, 3000K-5000K	3CCT, 3000K-5000K	3CCT, 3000K-5000K
CRI	>90	>90	>90	>90

Electrical System


Input Voltage	AC220-240V/120-277V	AC220-240V/120-277V	AC220-240V/120-277V	AC220-240V/120-277V
Max input current	0.25A	0.32A	0.38A	0.5A
Off State Power	0W	0W	0W	0W
Power Consumption	30W	37.5W	45W	60W
Max. Linkable Wattage	500W@120V	500W@120V	500W@120V	500W@120V
	1000W@230V	1000W@230V	1000W@230V	1000W@230V
	1200W@277V	1200W@277V	1200W@277V	1200W@277V
Dimming	No/0-10V/Triac/DALI	No/0-10V/Triac/DALI	No/0-10V/Triac/DALI	No/0-10V/Triac/DALI
Power Factor	0.95	0.95	0.95	0.95
Output voltage	DC40V±5%	DC40V±5%	DC40V±5%	DC40V±5%
Max output current	700mA	800mA	1050mA	1300mA

Regular and Voluntary Certifications


	5-year limited warranty	5-year limited warranty	5-year limited warranty	5-year limited warranty
	cETLus Certified	cETLus Certified	cETLus Certified	cETLus Certified
	CE Certified	CE Certified	CE Certified	CE Certified

PHOTOMETRIC CURVE:


30W, 3000K

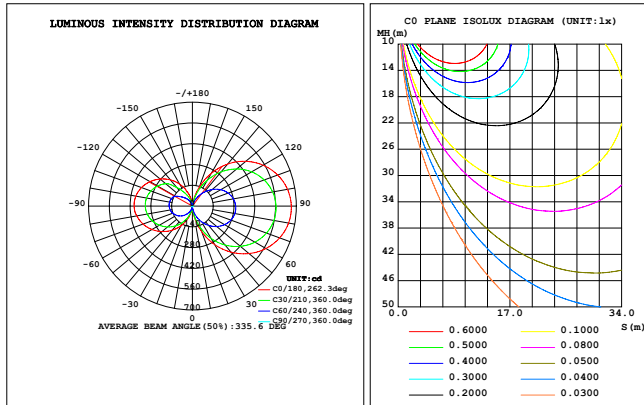


30W, 3000K

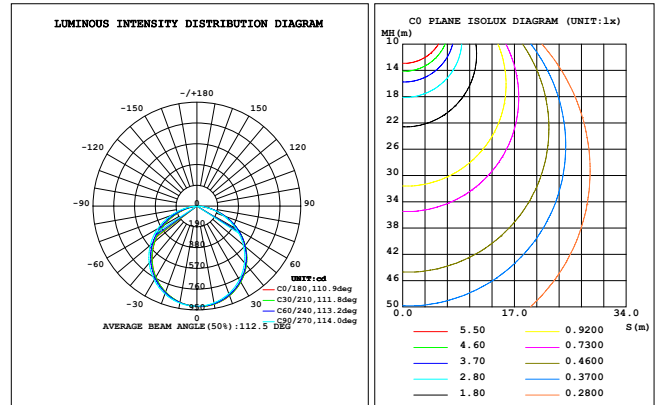


30W, 4000K

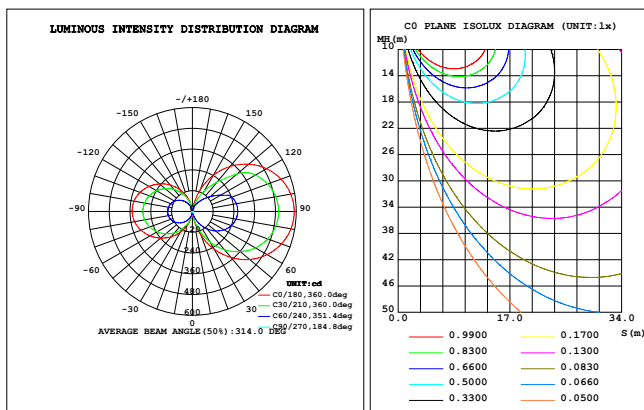

50W, 4000K

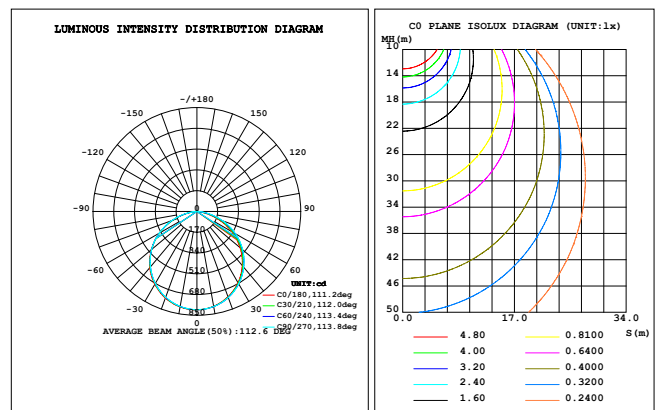

50W, 5000K

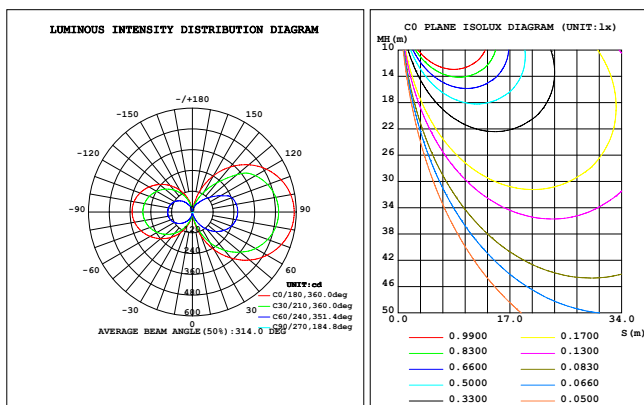

50W, 5000K

